

MUNCHER

HIGH OUTPUT SINGLE-UNIT RECYCLING SYSTEMS FROM MUNCHY



OUTPUTS FROM 100 - 500 Kgs/hr



FILM



BAGS, SACKS
&
PUNCH-OUTS



PURGINGS
&
START-UP SCRAP



FABRICS
&
NON WOVENS



FIBRES, TAPES
&
ROPES



MATERIAL
HANDLING
OPTIONS



POWERFUL
INTEGRATED
SHREDDER



EASY
CLEAN
PELLETISING




QUICK & EASY
OPERATOR
MAINTENANCE



1ST GRADE
QUALITY
PELLETS



TYPICAL RECYCLING CENTRE LAYOUT

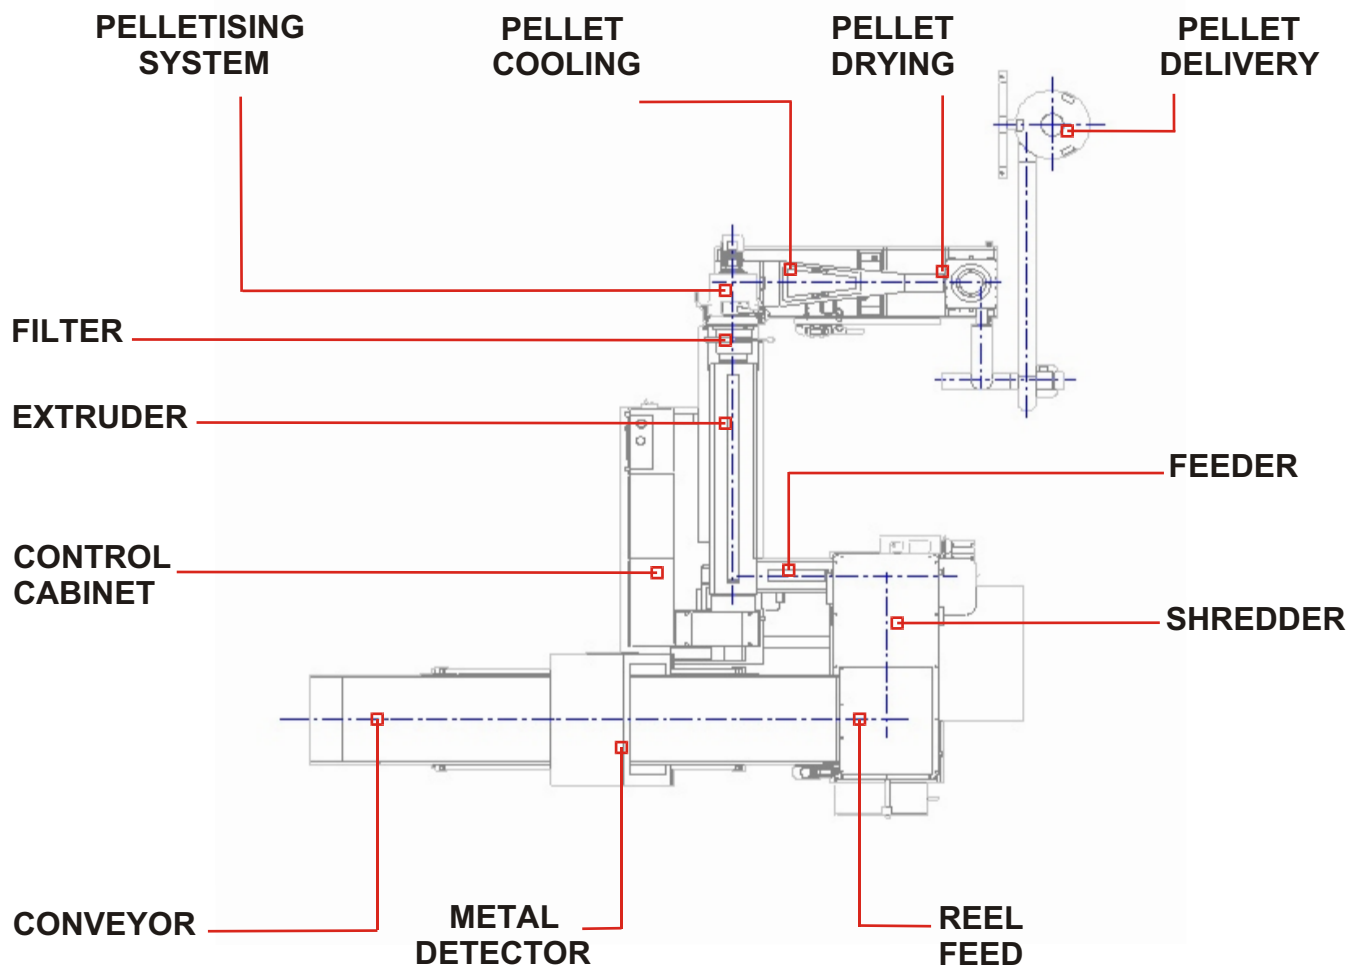

RANGE SPECIFICATION & OUTPUT GUIDE

Model	Extruder		Output	Pellet Cooling	
			Kgs/Hour	Air	Water
M100	60-25	Non-Vented	50-100	✓	✓
M100V	60-30	Vented	40-90	✓	✓
M200	75-25	Non-Vented	130-200	-	✓
M200V	75-30	Vented	125-175	-	✓
M300	90-25	Non-Vented	225-300	-	✓
M300V	90-30	Vented	210-275	-	✓
M500	100-25	Non-Vented	400-500	-	✓
M500V	100-30	Vented	375-450	-	✓

Above outputs are to be used only as a guide. Actual outputs are dependant upon material type, form and other influencing factors

Our policy of continuing design, materials and manufacturing improvement means that some modifications to this specification may be included

Navigation Road • Diglis • Worcester WR5 3DE • England
 Tel.: +44(0)1905 763100 • Fax: +44 (0)1905 763101
 Website: www.munchy.co.uk • Email: sales@munchy.co.uk

